

# SBR GRANULATE FITNESS TILE

DATASHEET

[www.ibuildgreen.se](http://www.ibuildgreen.se)



# TABLE OF CONTENTS

---

**I. THICKNESS & DIMENSIONS 02**

---

**II. NOISE REDUCTION 04**

---

**II. INSTALLATION METHODS 06**

---

**01. BASIC FITNESS TILE 08**

---

**02. STANDARD FITNESS TILE 14**

---

**03. STANDARD RAMP 20**

---

**04. PREMIUM FITNESS TILE 24**




## I. THICKNESS & DIMENSIONS

### THICKNESS


<b>BASIC</b> FLAT	20 mm
<b>STANDARD</b> FLAT	15 mm • 20 mm • 30 mm
<b>STANDARD</b> FLAT CONNECT	20 mm • 30 mm
<b>STANDARD</b> IMPACT	20 mm
<b>STANDARD</b> ANTI-SHOCK	25 mm • 30 mm • 43 mm • 50 mm • 60 mm
<b>PREMIUM</b> WITHOUT BEVEL	15 mm • 20 mm
<b>PREMIUM</b> WITH BEVEL	15 mm • 20 mm

Our **Standard Fitness Tiles** are available in 10 mm and 15 mm thickness. Most thicknesses have matching edges, corner profiles can be created from cutting the edges.


### DIMENSIONS

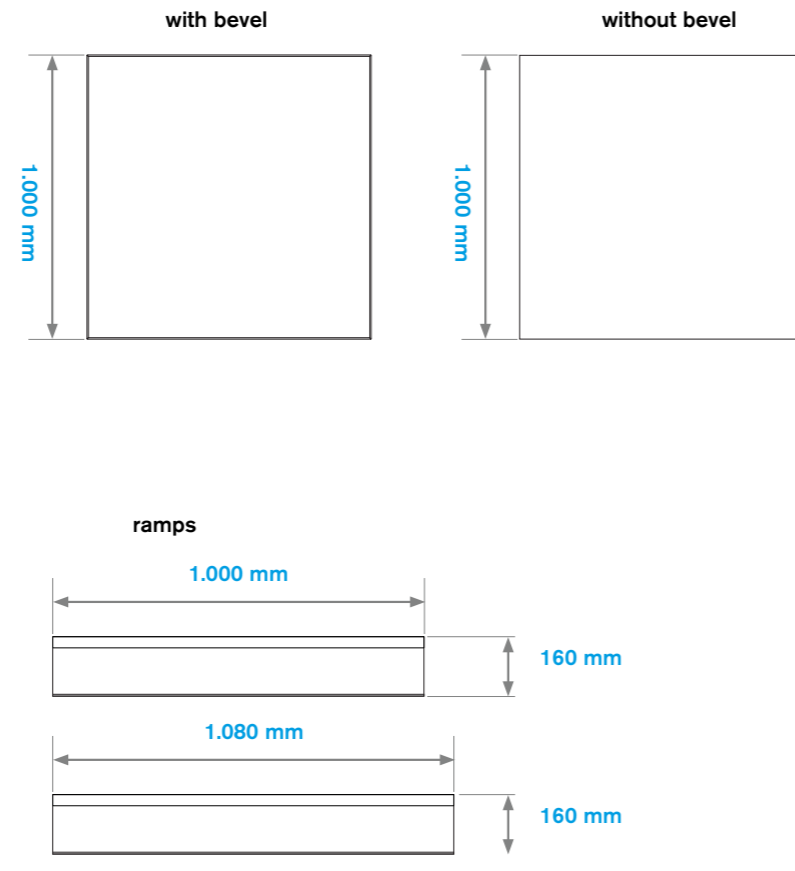

## DIMENSIONS

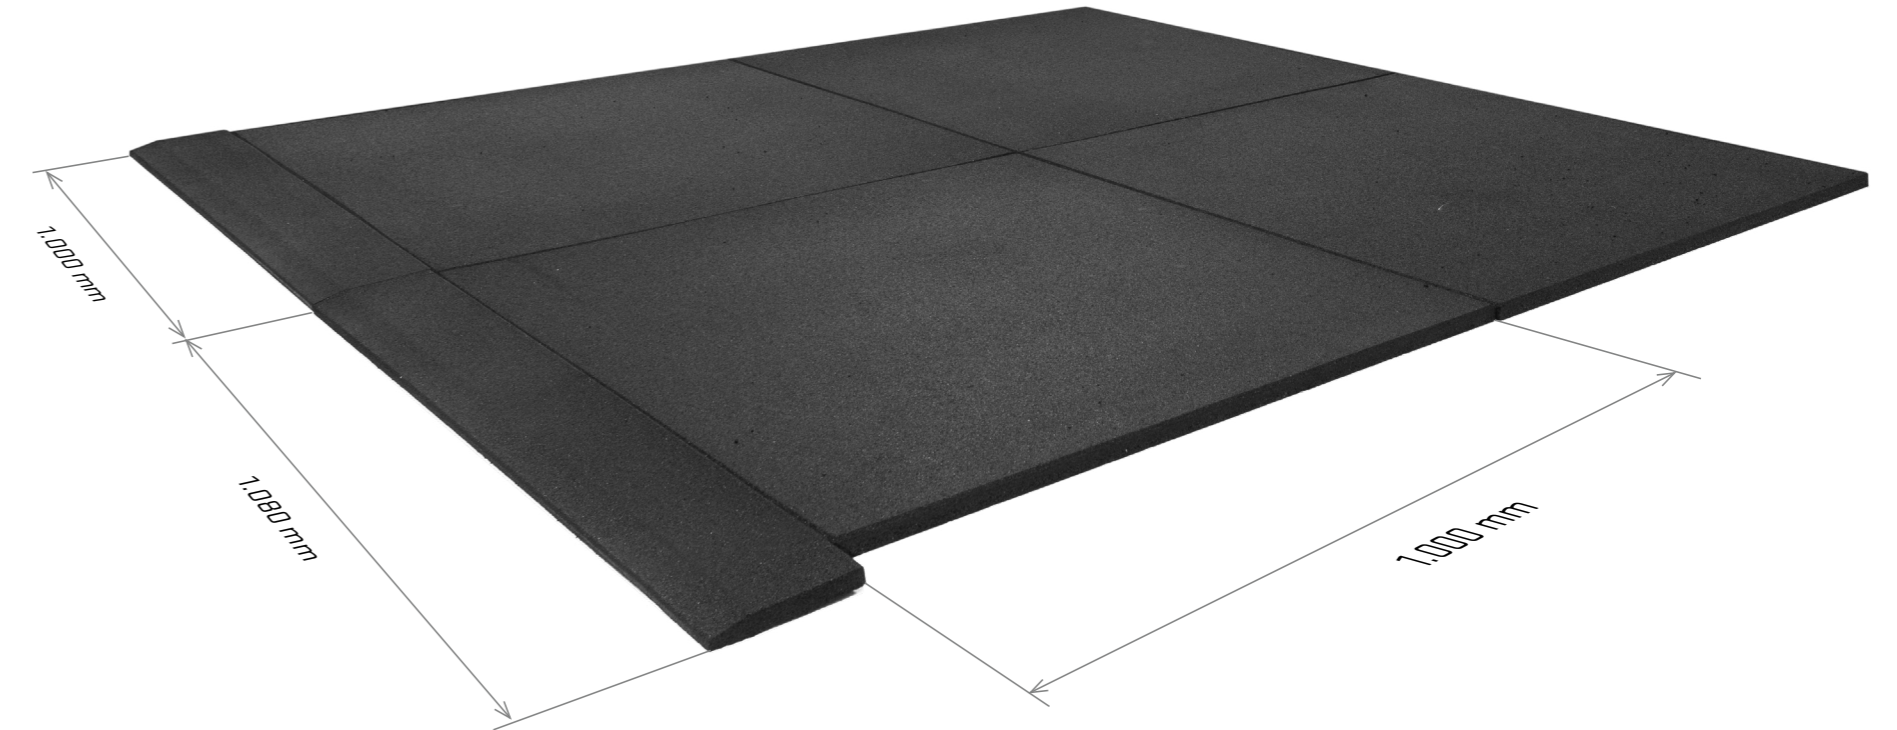

## II. NOISE REDUCTION

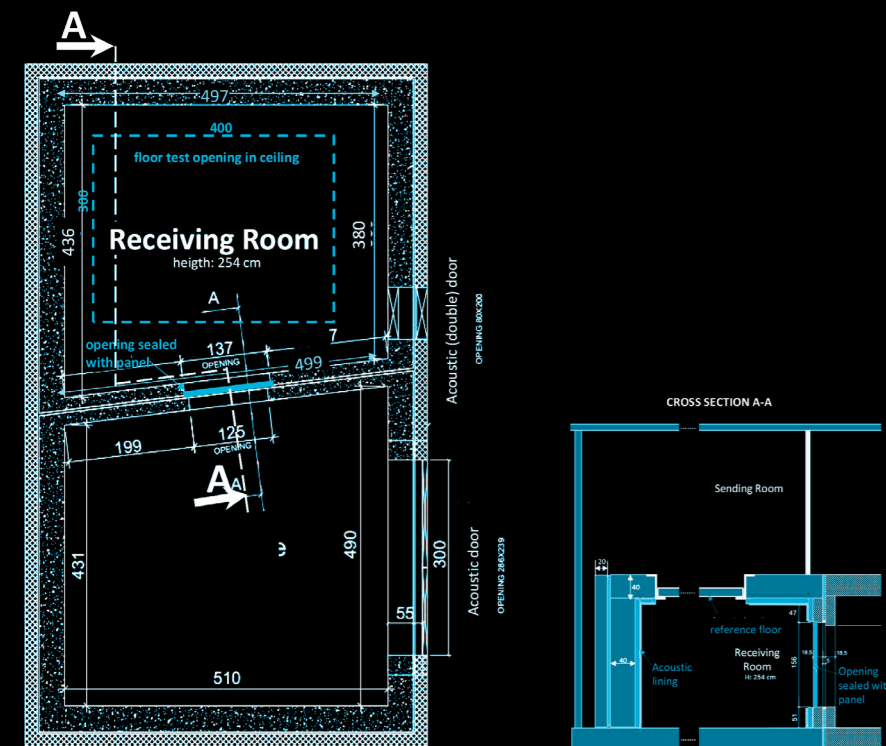

The test rooms meet the requirements of ISO 10140-5

Both rooms are isolated for vibrations by using a so called room-in-room construction.

One of the most common complaints about fitness facilities, coming from both members as neighbours, is that sound and vibration travels further and more intense than people feel comfortable with. Cautiously made decisions with regards to particularly your performance areas can play a pivotal role in the success of your business.

Here at **Stockz** we have worked hard to create the ideal solution for maximum sound reduction, whilst also making sure not to add unreasonable extra costs to this product.

Our thicker **Standard Fitness Tiles (30, 43, 53, 63)** were purposely engineered with a unique structured bottom which minimizes contact with the subfloor. Together with the tiles' composition and construction it intercepts, absorbs and disperses sound and vibration.

Even though the thinner tiles (20 mm) have a flat bottom, the ones we have tested still reach significant sound and impact vibration improvements.

## CERTIFIED NOISE REDUCING CAPABILITES

In order to solidify our findings, we have partnered up with an acoustics laboratory accredited according to NBN EN ISO 17025:2005, to execute a test for measurement of the reduction of impact noise by a floating floor system on a heavyweight standard floor.

The full report can be provided on request.

Summarizing the report, using our **Standard Fitness Tiles**, leads to the following results:

20 MM THICKNESS

23 DB REDUCTION\*

43 MM THICKNESS


25 DB REDUCTION

50 MM THICKNESS

25 DB REDUCTION

60 MM THICKNESS

25 DB REDUCTION

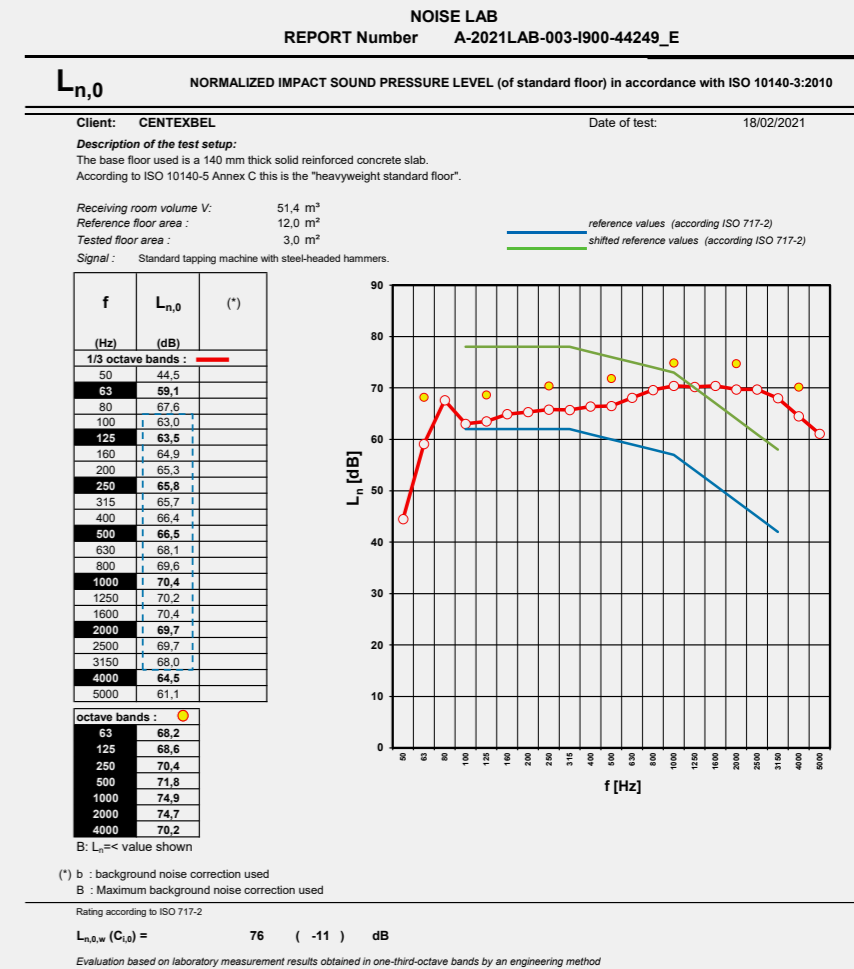

### III. INSTALLATION HALF BRICK WISE

Step 1




Step 2



Step 3




Step 4




Step 5




Step 6



Step 7



Step 8




For the **BASIC, STANDARD** as well as the **PREMIUM Fitness Tile** we recommend to work with a small overlap of 1 cm per every 5 tiles. After installing the complete area, the tiles can be squeezed in and this will make the small gaps dissolve. For the **PREMIUM Fitness Tiles** we recommend an overlap of 0.5 cm per every 10 tiles.

When the connectors are being used, these tiles can be installed without any overlap.

An animated installation video can also be made available upon request.

#### FINAL LOOK

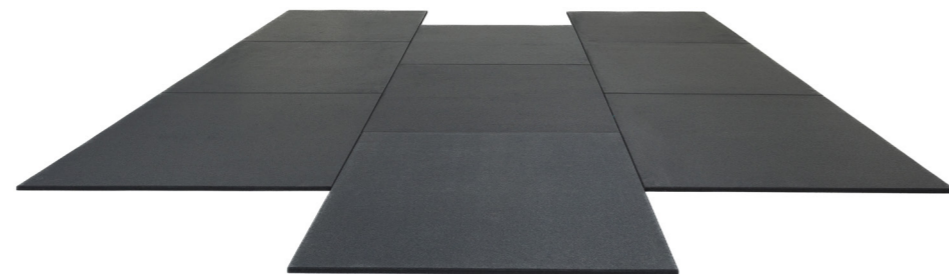

### III. INSTALLATION CORNER TO CORNER

We strongly recommend that if you prefer a *corner to corner* installation the **PREMIUM Fitness Tiles** should be used.

**BASIC- and STANDARD** Fitness Tiles are better suited for a *half-brick* installation.

Step 1



Step 2




Step 3




Step 4




Step 5




Step 6



Step 7



Step 8



#### FINAL LOOK




## 01. BASIC FITNESS TILE

The impact absorbing recycled rubber fitness tiles are made and designed for any freeweight and/or functional area.

The **BASIC Fitness Tile** has a 2-layer system; the bottom consists of coarse granules and the top layer of 5 mm consists of finer granules. The density is around 875 kg/m<sup>3</sup>. These tiles are manufactured in the EU and consist solely out of recycled European car tires, bonded with PU.

Because of only using high quality raw material our standard tiles are pretty much odourless which makes these a great match even for small, fully closed off rooms.

### THICKNESS



### DIMENSIONS




## THE BOTTOM


### FLAT

Provides stability and uniform support, suitable for exercises requiring balance and stability.

### SIDE VIEW



### BOTTOM VIEW



**IMAGE** BASIC Fitness Tile - 1.000 x 1.000 x 20 mm

## 01. BASIC FITNESS TILE

The BASIC Fitness Tile Black consists exclusively of recycled **SBR granules, bonded with PU.**


### SPECIFICATIONS

Bulk density toplayer	OTP 1168, PN-EN ISO 845:2010	Approx. 875 kg/m <sup>3</sup>
Tolerances	width ± 1 % • length ± 1 % • thickness ± 5 %	
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,3 m at 20 mm thickness
Slip resistance	PN-EN 13036-4:2004	dry ≤105 PTV wet ≤75 PTV
Thermal resistance		0,16 m <sup>2</sup> . K/W
Tensile strength, MPA		≤ 0,65
Elongation at break	PN-EN 12230:2005	≤ 40
Hardness	PN-ISO 868 PN-93 / C-04206	55 up to 75
EU fire classification	EF1	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	
Warranty	one year*	

\*warranty against manufacturing default – as described in our general Terms and Conditions

### COLOURS Dimensions & Thickness

Dimension 1000 x 1000 mm

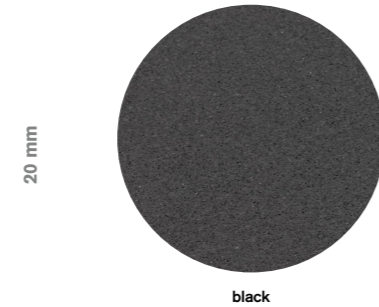

black





## II. BASIC BENEFITS



**EUROPEAN MANUFACTURED**



**100% RECYCLED RUBBER USED**



**ODOURLESS**

BASIC FITNESS TILE



**IMAGE** BASIC Fitness Tile - 1.000 x 1.000 x 20 mm

## 02. STANDARD FITNESS TILE

The high impact absorbing recycled rubber fitness tiles are made and designed for any freeweight and/or functional area.


The **STANDARD Fitness Tile** has a 2-layer system; the bottom consists of coarse granules and the top layer of 5 mm consists of finer granules. The density is up to 950 kg/m<sup>3</sup>. These tiles are manufactured in the EU and consist solely out of recycled European car tires, bonded with PU. Because of only using high quality raw material our standard tiles are pretty much odourless which makes these a great match even for small, fully closed off rooms.

### THICKNESS

**FLAT** 15 mm • 20 mm • 30 mm



**FLAT CONNECT** 20 mm • 30 mm



**IMPACT** 20 mm



**ANTI-SHOCK** 25 mm • 30 mm • 43 mm • 50 mm • 60 mm




### DIMENSIONS



## THE BOTTOMS



### FLAT

Provides stability and uniform support, suitable for exercises requiring balance and stability.




### FLAT CONNECT

Similar to the flat bottom, but with the differentiating option of adding a connecting system easing installation and minimizing potential gaps between tiles.

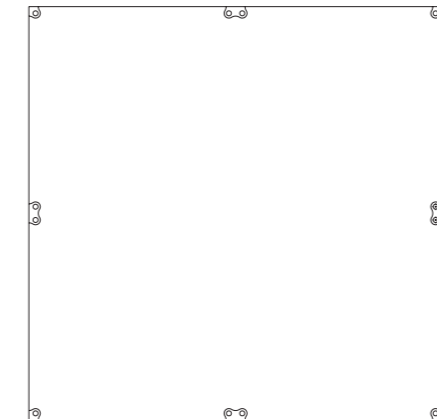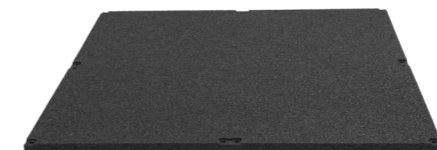


### IMPACT

Enhances shock absorption, reduces impact on joints and muscles, more suited for high-impact activities like jumping and running whilst also efficiently using less material compared to a Flat Bottom

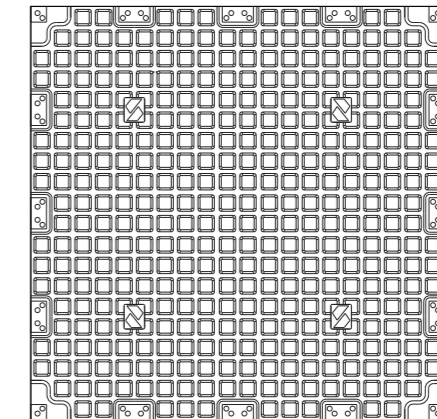

### ANTI-SHOCK

Our anti-shock bottom is designed to disperse even more sound & impact vibration.

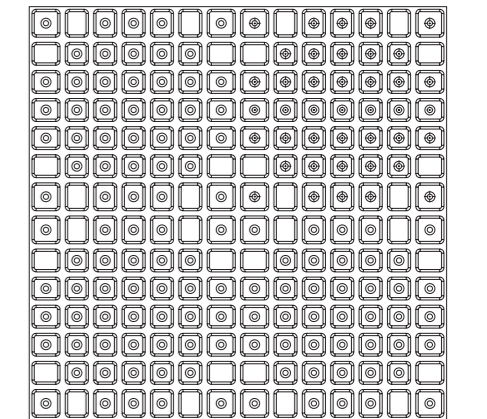

### ILLUSTRATIONS

BASIC Fitness Tile - 1.000 x 1.000

## 02. STANDARD FITNESS TILE

The STANDARD Fitness Tile Black consists exclusively of recycled **SBR granules, bonded with PU.**


### SPECIFICATIONS

<b>Bulk density toplayer</b>	OTP 1168, PN-EN ISO 845:2010	Approx. 900 to 950 kg/m <sup>3</sup>
<b>Tolerances</b>	width ± 1 % ▪ length ± 1 % ▪ thickness ± 5 %	
<b>Shock Absorption</b>	EN 14808	61%
<b>Vertical deformation</b>	EN 14809	5 mm
<b>Head injury criteria (HIC) test</b>	EN 1177	1,8 m at 60 mm thickness
<b>Slip resistance</b>	PN-EN 13036-4:2004	dry ≤105 PTV wet ≤75 PTV
<b>Thermal resistance</b>		Approx. 0,16 m <sup>2</sup> . K/W
<b>Abrasion resistance, mg</b>	PN-EN ISO 5470-1:2001	≤ 560
<b>Tensile strength, MPA</b>		≤ 0,65
<b>Elongation at break</b>	PN-EN 12230:2005	≤ 40
<b>Hardness</b>	PN-ISO 868 PN-93 / C-04206	55 up to 75
<b>EU fire classification</b>	EF1	
<b>Additional</b>	Compliance with content of pentachlorophenol Antistatic floor covering	
<b>Warranty</b>	one year*	

\*warranty against manufacturing default – as described in our general Terms and Conditions

### COLOURS Dimensions & Thickness

<b>Dimension</b>	1.000 x 1.000 mm
<b>Thickness</b>	20 mm
<b>Colour</b>	black



## 02. STANDARD BENEFITS



**HIGH DENSITY**



**EUROPEAN MANUFACTURED**



**100% RECYCLED RUBBER USED**



**ODOURLESS**

## TOP VIEWS

FLAT



FLAT CONNECT




IMPACT



ANTI-SHOCK



## DETAILED VIEW

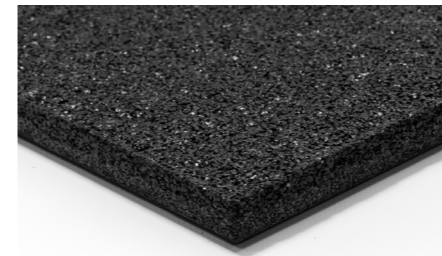

## 04. STANDARD RAMP



### SPECIFICATIONS

<b>Bulk density toplayer</b>	OTP 1168, PN-EN ISO 845:2010	Approx. 900 to 950 kg/m <sup>3</sup>
<b>Tolerances</b>	width ± 1 % ▪ length ± 1 % ▪ thickness ± 5 %	
<b>Shock Absorption</b>	EN 14808	61%
<b>Vertical deformation</b>	EN 14809	5 mm
<b>Head injury criteria (HIC) test</b>	EN 1177	1,8 m at 60 mm thickness
<b>Slip resistance</b>	PN-EN 13036-4:2004	dry ≤105 PTV wet ≤75 PTV
<b>Thermal resistance</b>		Approx. 0,16 m <sup>2</sup> . K/W
<b>Abrasion resistance, mg</b>	PN-EN ISO 5470-1:2001	≤ 560
<b>Tensile strength, MPA</b>		≤ 0,65
<b>Elongation at break</b>	PN-EN 12230:2005	≤ 40
<b>Hardness</b>	PN-ISO 868 PN-93 / C-04206	55 up to 75
<b>EU fire classification</b>	EF1	
<b>Additional</b>	Compliance with content of pentachlorophenol Antistatic floor covering	
<b>Warranty</b>	one year*	


\*warranty against manufacturing default – as described in our general Terms and Conditions

The STANDARD Fitness Tile Black consists exclusively of **recycled SBR granules, bonded with PU.**

### COLOURS
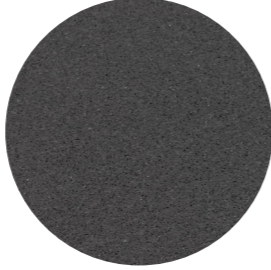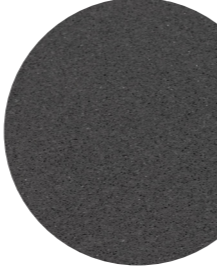
<b>Dimension</b>	160 x 1.000 mm	160 x 1.080 mm
		
	black	black

### DIMENSIONS

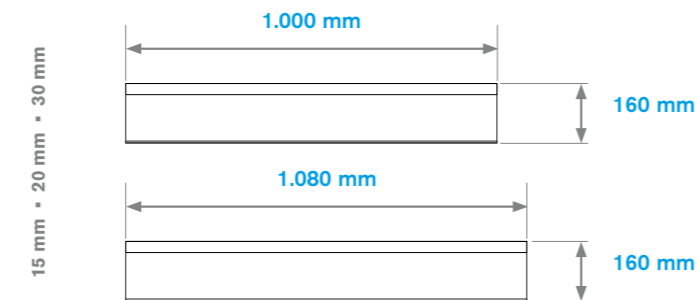



**STANDARD Fitness Tiles + Ramps (1.080)**  
 3x STANDARD Ramps 160 x 1.080 x 20 mm black + 9x STANDARD Fitness Tiles 20 mm black



**STANDARD Fitness Tiles + Ramps (1.000)**  
 3x STANDARD Ramps 160 x 1.000 x 20 mm black + 9x STANDARD Fitness Tile 20 mm black

### 03. PREMIUM FITNESS TILE

The high impact absorbing recycled rubber fitness tiles are made and designed for any freeweight and/or functional area.

The **PREMIUM Fitness Tile** consists fully of finer granules, from 0.5 to 2mm. The density is 1.000 kg/m<sup>3</sup>. These tiles are manufactured in the EU and consist solely out of recycled European car tires, bonded with PU. Because of only using high quality raw material our **PREMIUM Fitness Tiles** are pretty much odourless which makes these a great match even for small, fully closed off rooms.


**Our PREMIUM Fitness Tiles are available in two versions:**

with bevel and without bevel. Both versions are finished by CNC/waterjet cutting, ensuring precise edges and minimal size tolerance (maximum 1 mm) for easy installation. The version without bevel offers a sleek, seamless appearance, while the version with bevel provides a sharp, clean aesthetic."


#### DIMENSIONS



WITHOUT BEVEL 15 mm • 20 mm




WITH BEVEL 15 mm • 20 mm




### TWO VERSIONS

#### NO BEVEL

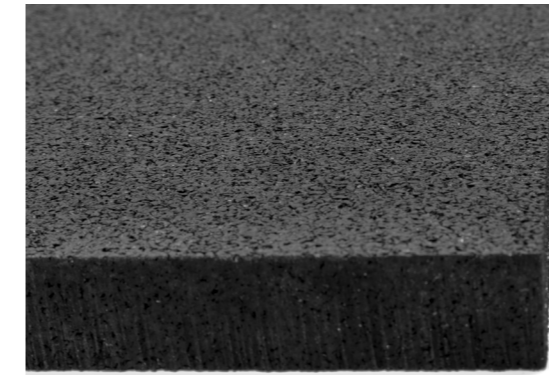

#### WITH BEVEL

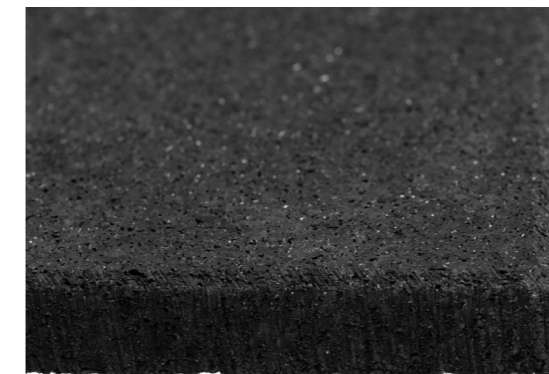

## 04. PREMIUM FITNESS TILE



The PREMIUM Fitness Tile Black consists exclusively of *recycled SBR granules, bonded with PU.*

### SPECIFICATIONS


<b>Bulk density</b>	OTP 1168, PN-EN ISO 845:2010	Approx. 1.000 kg/m <sup>3</sup>
<b>Flammability</b>	EF1 without CFL, EFL-S1; Cfl-s1; Cfl-s2, NORMA PN-EN ISO 9239-1:2010; PN-EN ISO 11925-2:210	
<b>Tolerances</b>	width $\pm 1\%$ ▪ length $\pm 1\%$ ▪ thickness $\pm 5\%$	
<b>Anti-slip properties</b>	Determination of the value according to DIN 51 131 dry 56    wet 43	
<b>Additional</b>	Compliance with content of pentachlorophenol Antistatic floor covering	
<b>Warranty</b>	12 months*	

\*warranty against manufacturing default – as described in our general Terms and Conditions

### COLOURS    Dimensions & Thickness

<b>Dimension</b>	1.000 x 1.000 mm
15 mm	
	100% black
20 mm	
	100% black



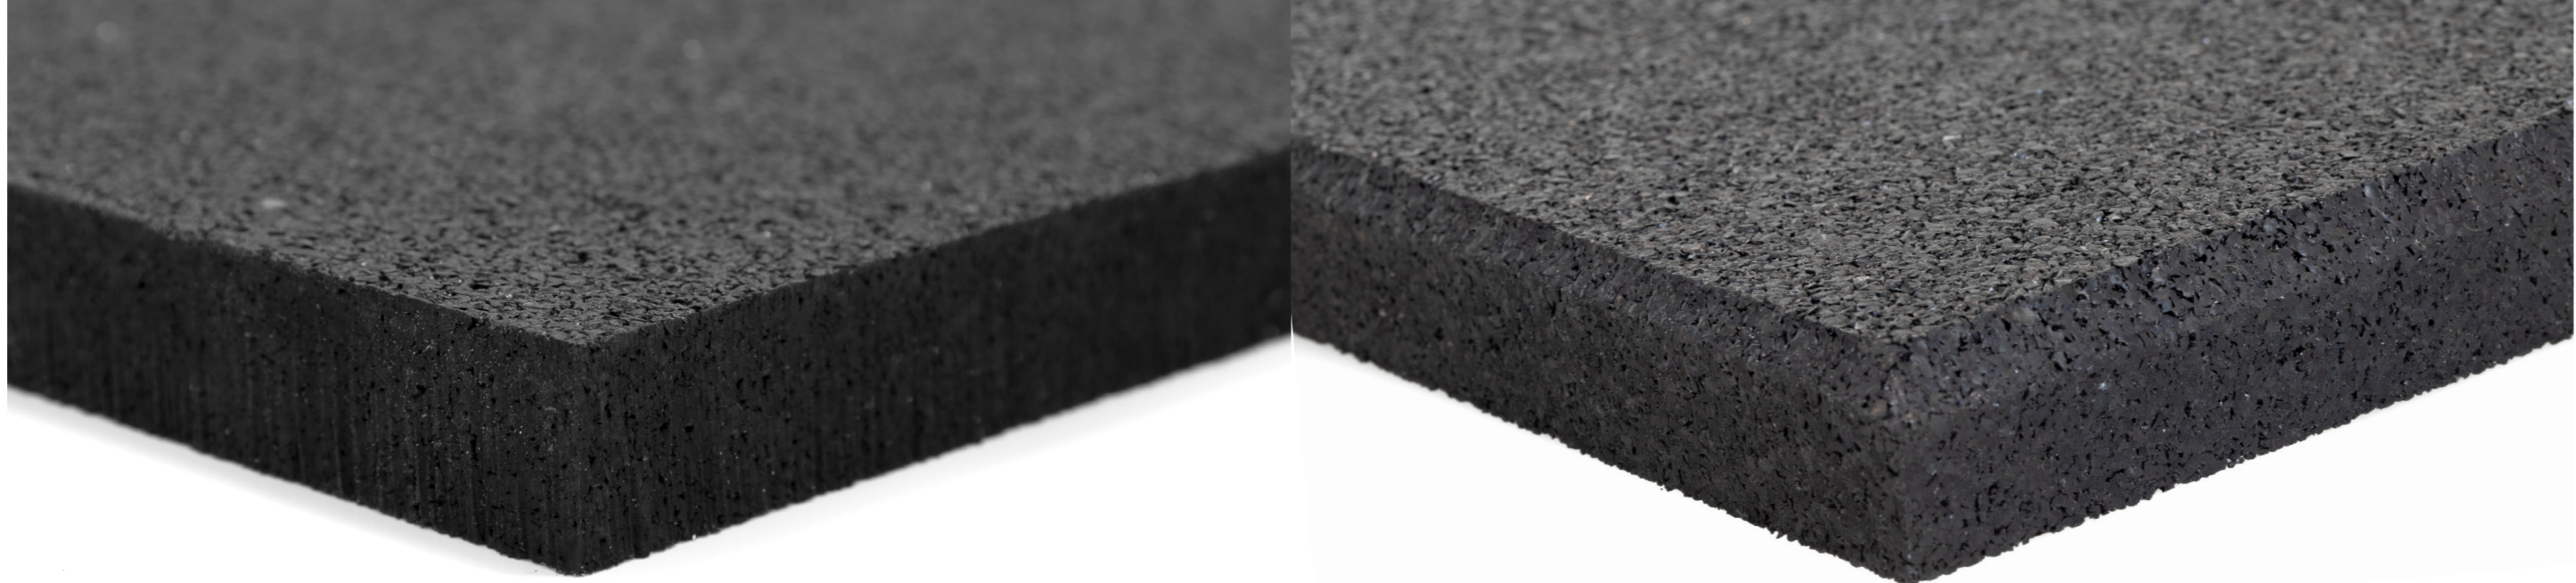

---

**WITHOUT BEVEL**  
PREMIUM 20 mm black



---

**WITH BEVEL**  
PREMIUM 20 mm black

### 03. PREMIUM BENEFITS



**HIGH DENSITY**




**EUROPEAN MANUFACTURED**



**100% RECYCLED RUBBER USED**



**ODOURLESS**

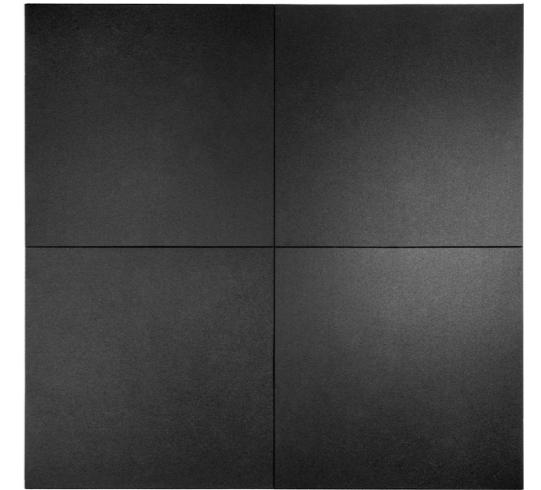

**MINIMAL SIZE DIFFERENCES**



**VISIT US** [www.ibuildgreen.se](http://www.ibuildgreen.se)

SportCity (Amsterdam, NL)  
STANDARD 43 mm antishock

**CONTACT US** [www.ibuildgreen.se](http://www.ibuildgreen.se)

**THANK YOU**