

iBuildGreen
ECO SOLUTIONS

PREMIUM X-TILE

DATASHEET

www.ibuildgreen.se



TABLE OF CONTENTS


I. DIMENSIONS & COLOURS	02	01. FIFTEEN	12
II. PREMIUM X-TILE	04	02. PURE BLACK	14
II. CONNECTOR	06	03. 70% EPDM	16
III. NOISE REDUCTION	08	04. SPECIAL	18
VI. BENEFITS	10	05. RAMPS	20
		06. CORNERS	24

I. DIMENSIONS & COLOURS

Ensuring our products remain easy to install, we kept the 30 mm and 40 mm thick square tiles at a size of 500 x 1.000 mm. Our tiles of 20 mm thickness are double the size, they have a dimension of 1.000 x 1.000 mm.

The matching ramps and corners add 250 mm to the total width and are available in 20, 30 and 40 mm thicknesses.

DIMENSIONS

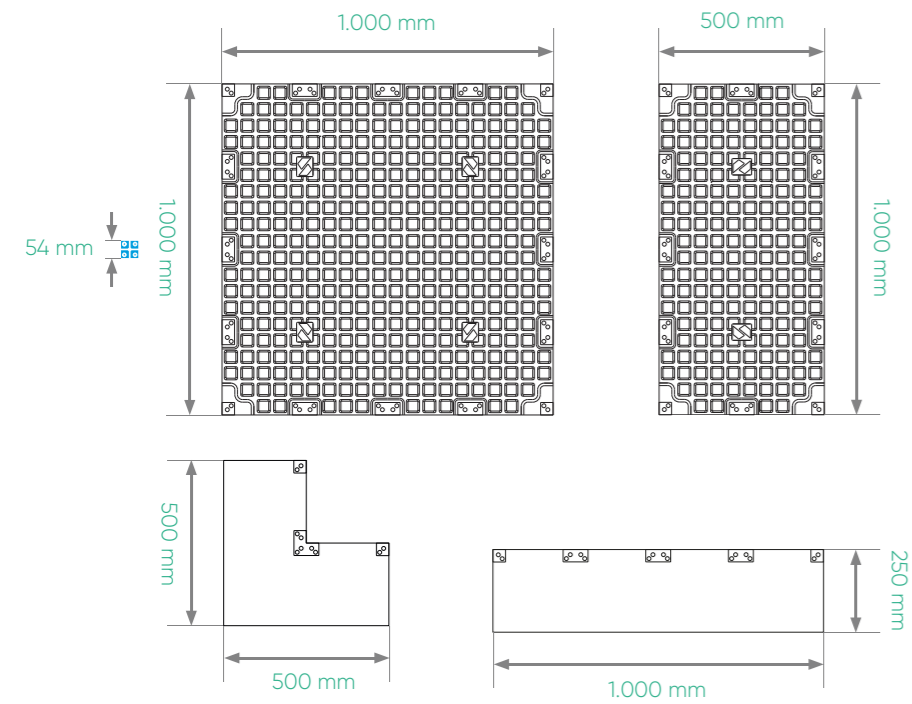

WIDE RANGE OF COLOURS

20 MM THICKNESS



30 MM THICKNESS




40 MM THICKNESS



II. PREMIUM X-TILE

The premium x-tile is highly durable and tough. The extremely dense toplayer provides sufficient impact protection against the continuous dropping of heavy freeweights. The sublayer and purpose designed bottom structure will absorb noise whilst also providing additional protection to the sublayer or screed. These tiles can even be laid on top of existing floor coverings and are very easy to install using the unique connector system. Next to convenience, using connectors also has aesthetic and hygiene advantages as it creates nearly invisible joints.

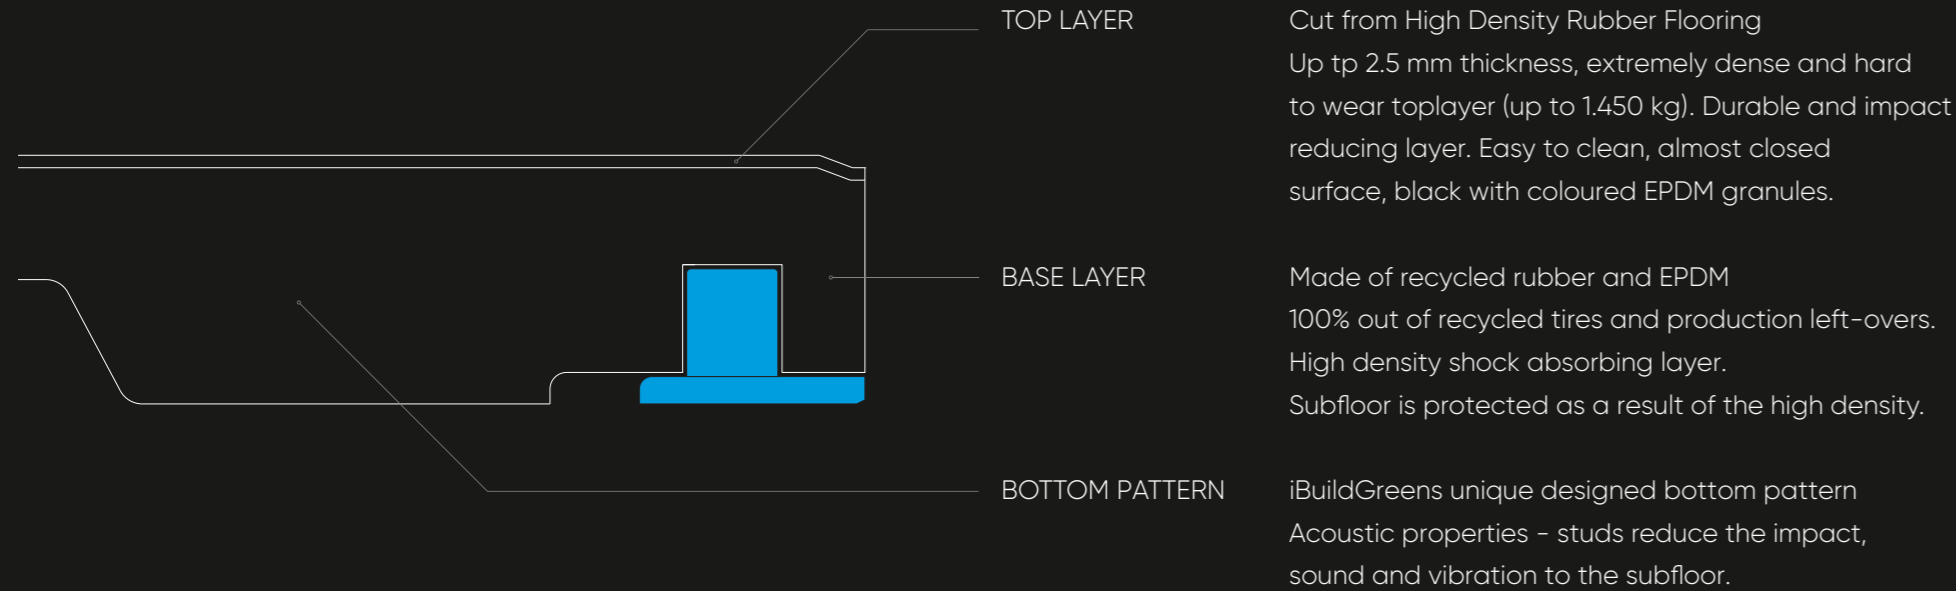


THE BOTTOM

Our impact bottom, designed for shock absorption and reducing impact sound. The pattern on the bottom holds holes for the connector system. The tiles are manufactured in a single process which vulcanizes the top layer onto the bottom in one step.




IMAGE Premium x-tile- 1.000 x 1.000 mm

SIDE VIEW




BOTTOM VIEW

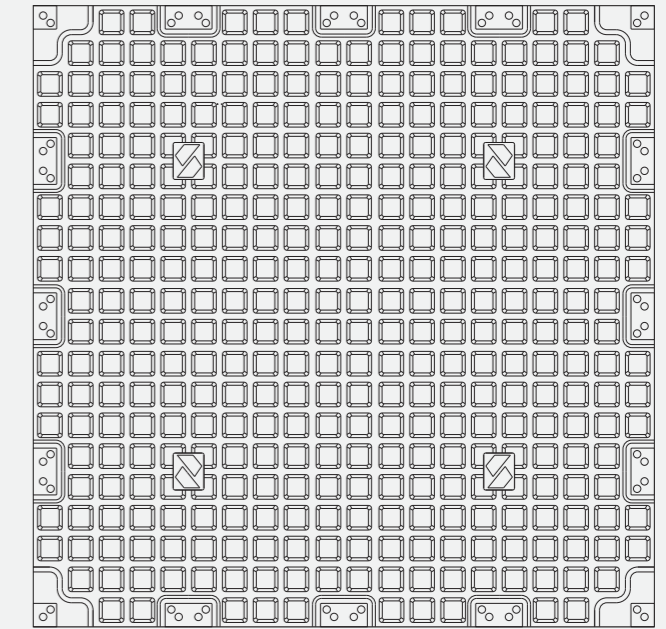

III. CONNECTORS

The Fitness Tiles can be installed easily by using the connector system, there is no need to glue these. Edges can be covered with a stainless steel or aluminium profile.

The tiles can easily be cut to the right size using a handknife, for which we recommend to use hollow knives. Use a rubber hammer to close the joints.

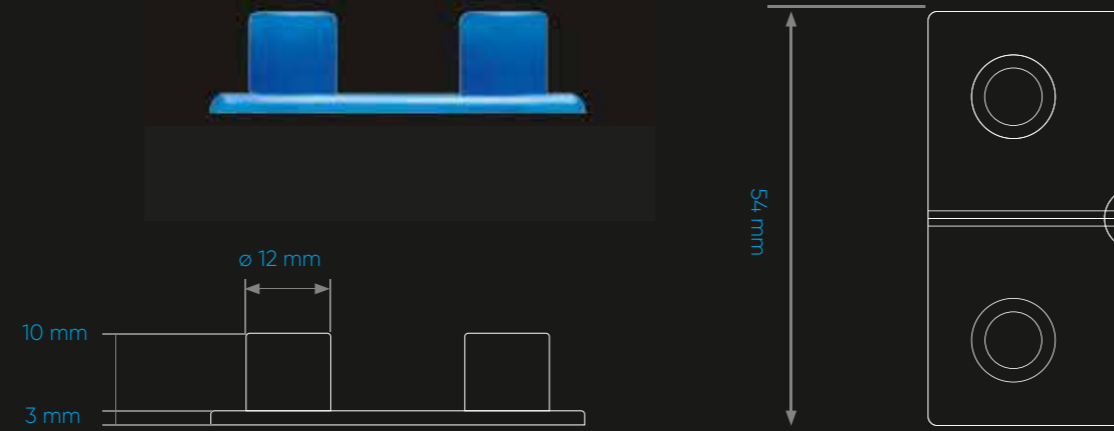

THE CONNECTOR SYSTEM

A connector is positioned at intervals of 20 centimeters, resulting in an average utilization of 7 connectors per square meter tile and 5 connectors per half-square meter tile. This, coupled with our connectors' construction from PolyPropylene, guarantees secure tile placement once connected.

This yields an outstanding free-floating system, accomplished without the need for adhesive or intricate installation techniques.

SIDE VIEW + CONNECTORS



BOTTOM VIEW + CONNECTORS

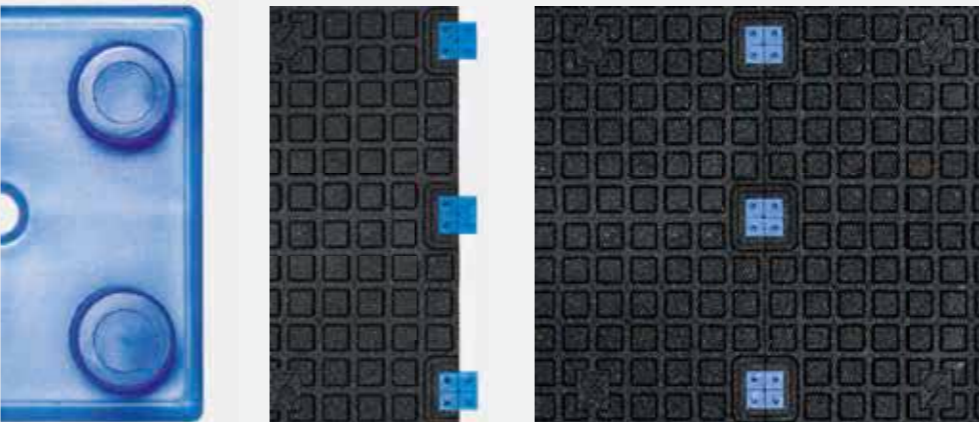
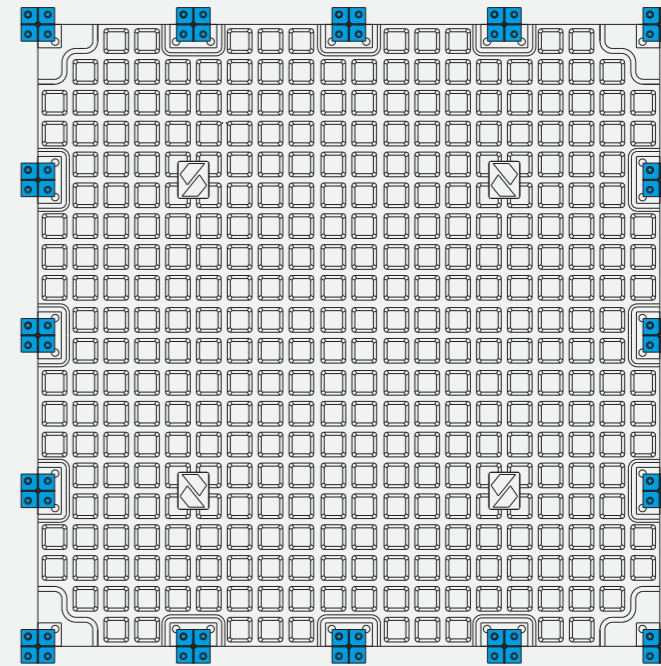



IMAGE Premium x-tile - 1.000 x 1.000 mm + CONNECTORS

IV. NOISE REDUCTION

One of the most common complaints about fitness facilities, coming from both members as neighbours, is that sound and vibration travels further and more intense than people feel comfortable with. Cautiously made decisions with regards to particularly your performance areas can play a pivotal role in the success of your business.

We have worked hard to create the ideal solution for maximum sound reduction, whilst also making sure not to add unreasonable extra costs to this product.

Our Premium x-tile were purposely engineered with a unique structured bottom which minimizes contact with the subfloor. Together with the tiles' composition and construction it intercepts, absorbs and disperses sound and vibration.

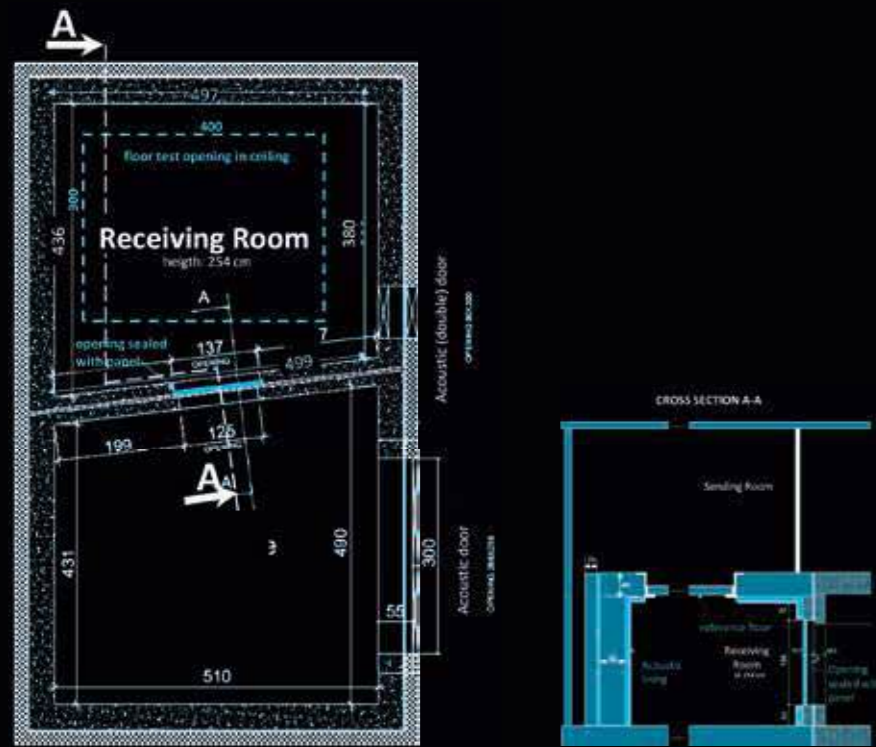



The test rooms meet the requirements of ISO 10140-5. Both rooms are isolated for vibrations by using a so called room-in-room construction.

CERTIFIED NOISE REDUCING CAPABILITES

In order to solidify our findings, we have partnered up with an acoustics laboratory accredited according NBN EN ISO 17025:2005, to execute a test for measurement of the reduction of impact noise by a floating floor system on a heavyweight standard floor.

The full report can be provided on request.

Summarizing the report, using our Premium x-tile, leads to the following results:

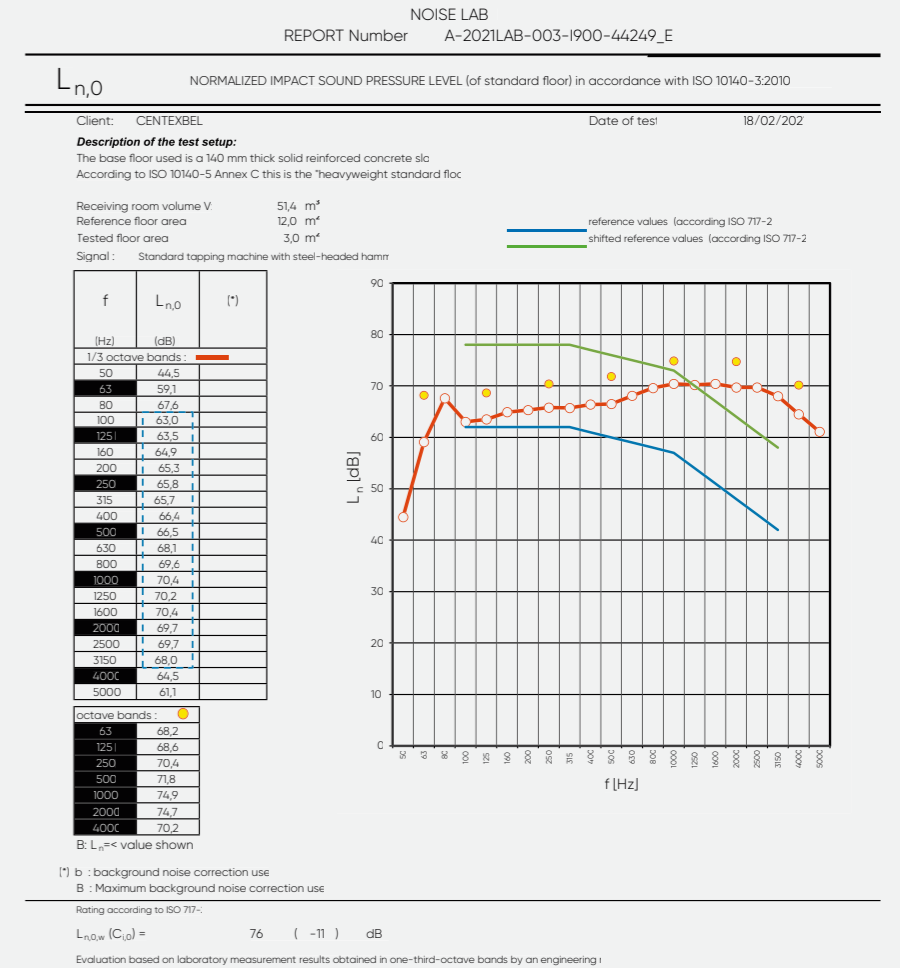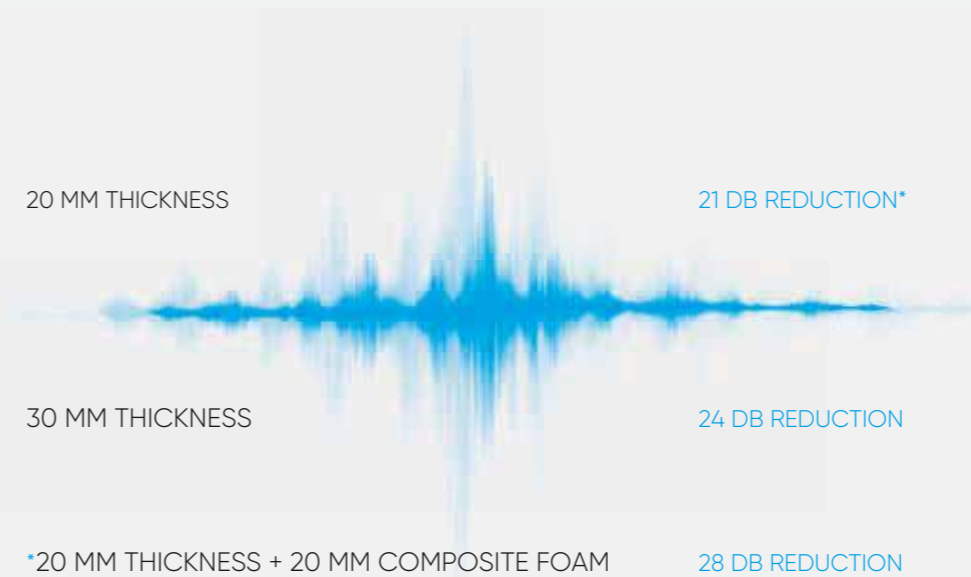

V. BENEFITS



EASY TO CLEAN



EASY TO INSTALL



EXTENSIVE 5 YEAR WARRANTY



ACOUSTIC QUALITIES

01. FIFTEEN













The Premium x-tile FIFTEEN's toplayer consists of 85% SBR and holds 15% coloured EPDM.

SPECIFICATIONS

Bulk density toplayer	Approx. 1.050 kg/m ³
Bulk density sublayer	Approx. 1.000 kg/m ³
Tolerances	+/- 1,5 %
Sound insulation Certified Noise Reducing	20mm 21dB reduction 30mm 24dB reduction 40mm not specified
Shock Absorption	EN 14808 61%
Vertical deformation	EN 14809 5 mm
Head injury criteria (HIC) test	EN 1177 1,5 m at 50 mm thickness
EU fire classification	EF1
Dynamic coefficient of friction	Dry slip resistance
Thermal resistance	0,16 m ² . K/W
Additional	Compliance with content of pentachlorophenol Antistatic floor covering

COLOURS

Dimensions & Thickness

Dimension	1000 x 1000 mm	500 x 1000 mm
20 mm	 15% blue	 15% light grey
	 15% green	
	 15% red	
30 mm	 15% yellow	 15% light grey
	 15% light grey	
	 15% dark grey	
40 mm	 15% orange	 15% light grey
	 15% light grey	
	 15% red	

VISIT US www.ibuildgreen.se

REFERENCE



Jumpers Fitness (Monheim, Germany)
FIFTEEN 15% dark grey



02. PURE BLACK





The Premium x-tile PURE BLACK consists of 100% SBR

SPECIFICATIONS

Bulk density toplayer	Approx. 1.050 kg/m ³	
Bulk density sublayer	Approx. 1.000 kg/m ³	
Tolerances	+/- 1,5 %	
Sound insulation	20mm	21dB reduction
Certified Noise Reducing	30mm	24d dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
EU fire classification	EF1	
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m ² . K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	

COLOURS

Dimensions & Thickness

Dimension	1000 x 1000 mm	500 x 1000 mm
20 mm	 100% pure black	 100% pure black
30 mm		 100% pure black
40 mm		 100% pure black

03. 70% EPDM

The Premium x-tile 70% EPDM consists of 70% coloured EPDM.

SPECIFICATIONS

Bulk density toplayer	Approx. 1.350 kg/m ³
Bulk density sublayer	Approx. 1.000 kg/m ³
Tolerances	+/- 1,5 %
Sound insulation Certified Noise Reducing	20mm 21dB reduction 30mm 24d dB reduction 40mm not specified
Shock Absorption	EN 14808 61%
Vertical deformation	EN 14809 5 mm
Head injury criteria (HIC) test	EN 1177 1,5 m at 50 mm thickness
EU fire classification	Dfl
Dynamic coefficient of friction	Dry slip resistance
Thermal resistance	0,16 m ² . K/W
Additional	Compliance with content of pentachlorophenol Antistatic floor covering

COLOURS

Dimensions & Thickness

Dimension	1000 x 1000 mm	500 x 1000 mm
20 mm	 Stone	 Granite
30 mm	 Stone	
40 mm	 Stone	



The Habit (Frankfurt, Germany)
70% EPDM stonemidgrey



Special Honeycomb

04. SPECIALS

The toplayer of the Premium x-tile DESERT and BEACH consists of a mix between EPDM and shoe production leftovers.

SPECIFICATIONS

Bulk density toplayer	Approx. 1.450 kg/m ³
Bulk density sublayer	Approx. 1.000 kg/m ³
Tolerances	+/- 1,5 %
Sound insulation Certified Noise Reducing	20mm 21dB reduction 30mm 24d dB reduction 40mm not specified
Shock Absorption	EN 14808 61%
Vertical deformation	EN 14809 5 mm
Head injury criteria (HIC) test	EN 1177 1,5 m at 50 mm thickness
Dynamic coefficient of friction	Dry slip resistance
Thermal resistance	0,16 m ² . K/W
Additional	Compliance with content of pentachlorophenol Antistatic floor covering

COLOURS

Dimensions & Thickness



beach desert honeycomb

05. RAMPS




















The Premium x-tile RAMPS are available in 100% pure black and with 15% coloured EPDM.


SPECIFICATIONS

Bulk density toplayer	From approx. 1.050 kg/řrup to 1.450 kg/řrup	
Bulk density sublayer	Approx. 1.000 kg/řrup	
Tolerances	+/- 1,5 %	
Sound insulation	20mm	21dB reduction
Certified Noise Reducing	30mm	24d dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
EU fire classification	EF1	
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m ² . K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	


COLOURS

Dimensions & Thickness

Dimension	250 x 1.000 mm					
20 mm						
	pure black	15% light grey	15% dark grey	15% blue	15% green	15% red
30 mm						
	15% yellow	stone	granite	beach	desert	
40 mm						
	pure black	15% light grey	15% dark grey	stone		
40 mm						
	pure black	15% light grey	stone	15% orange		

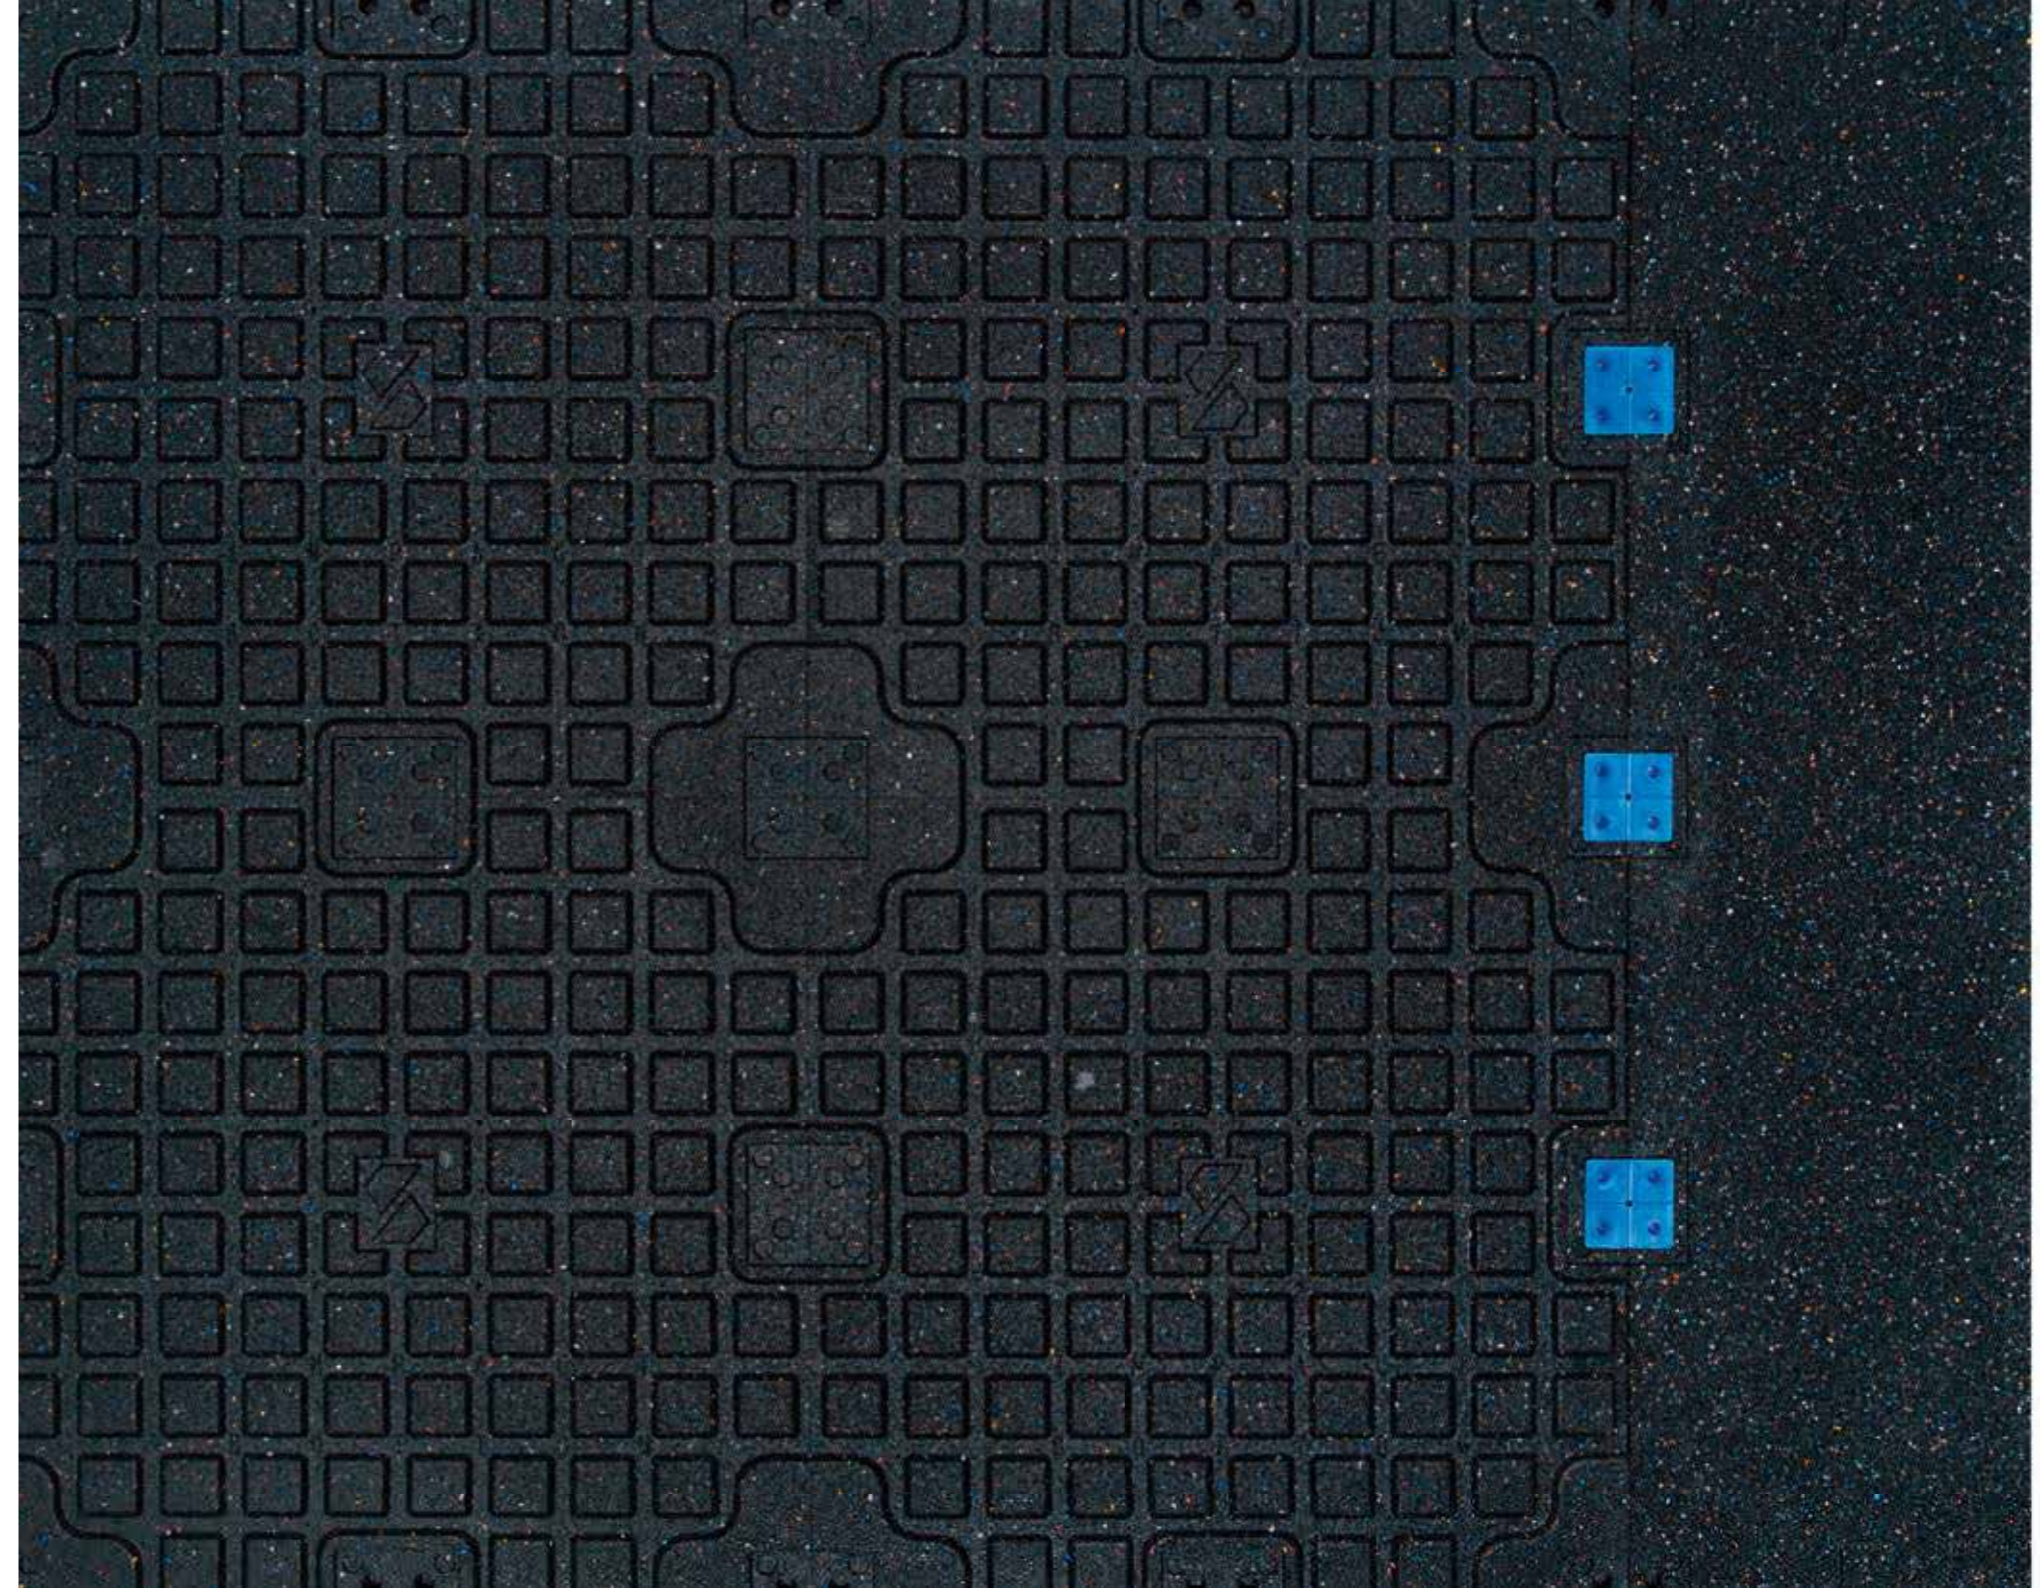



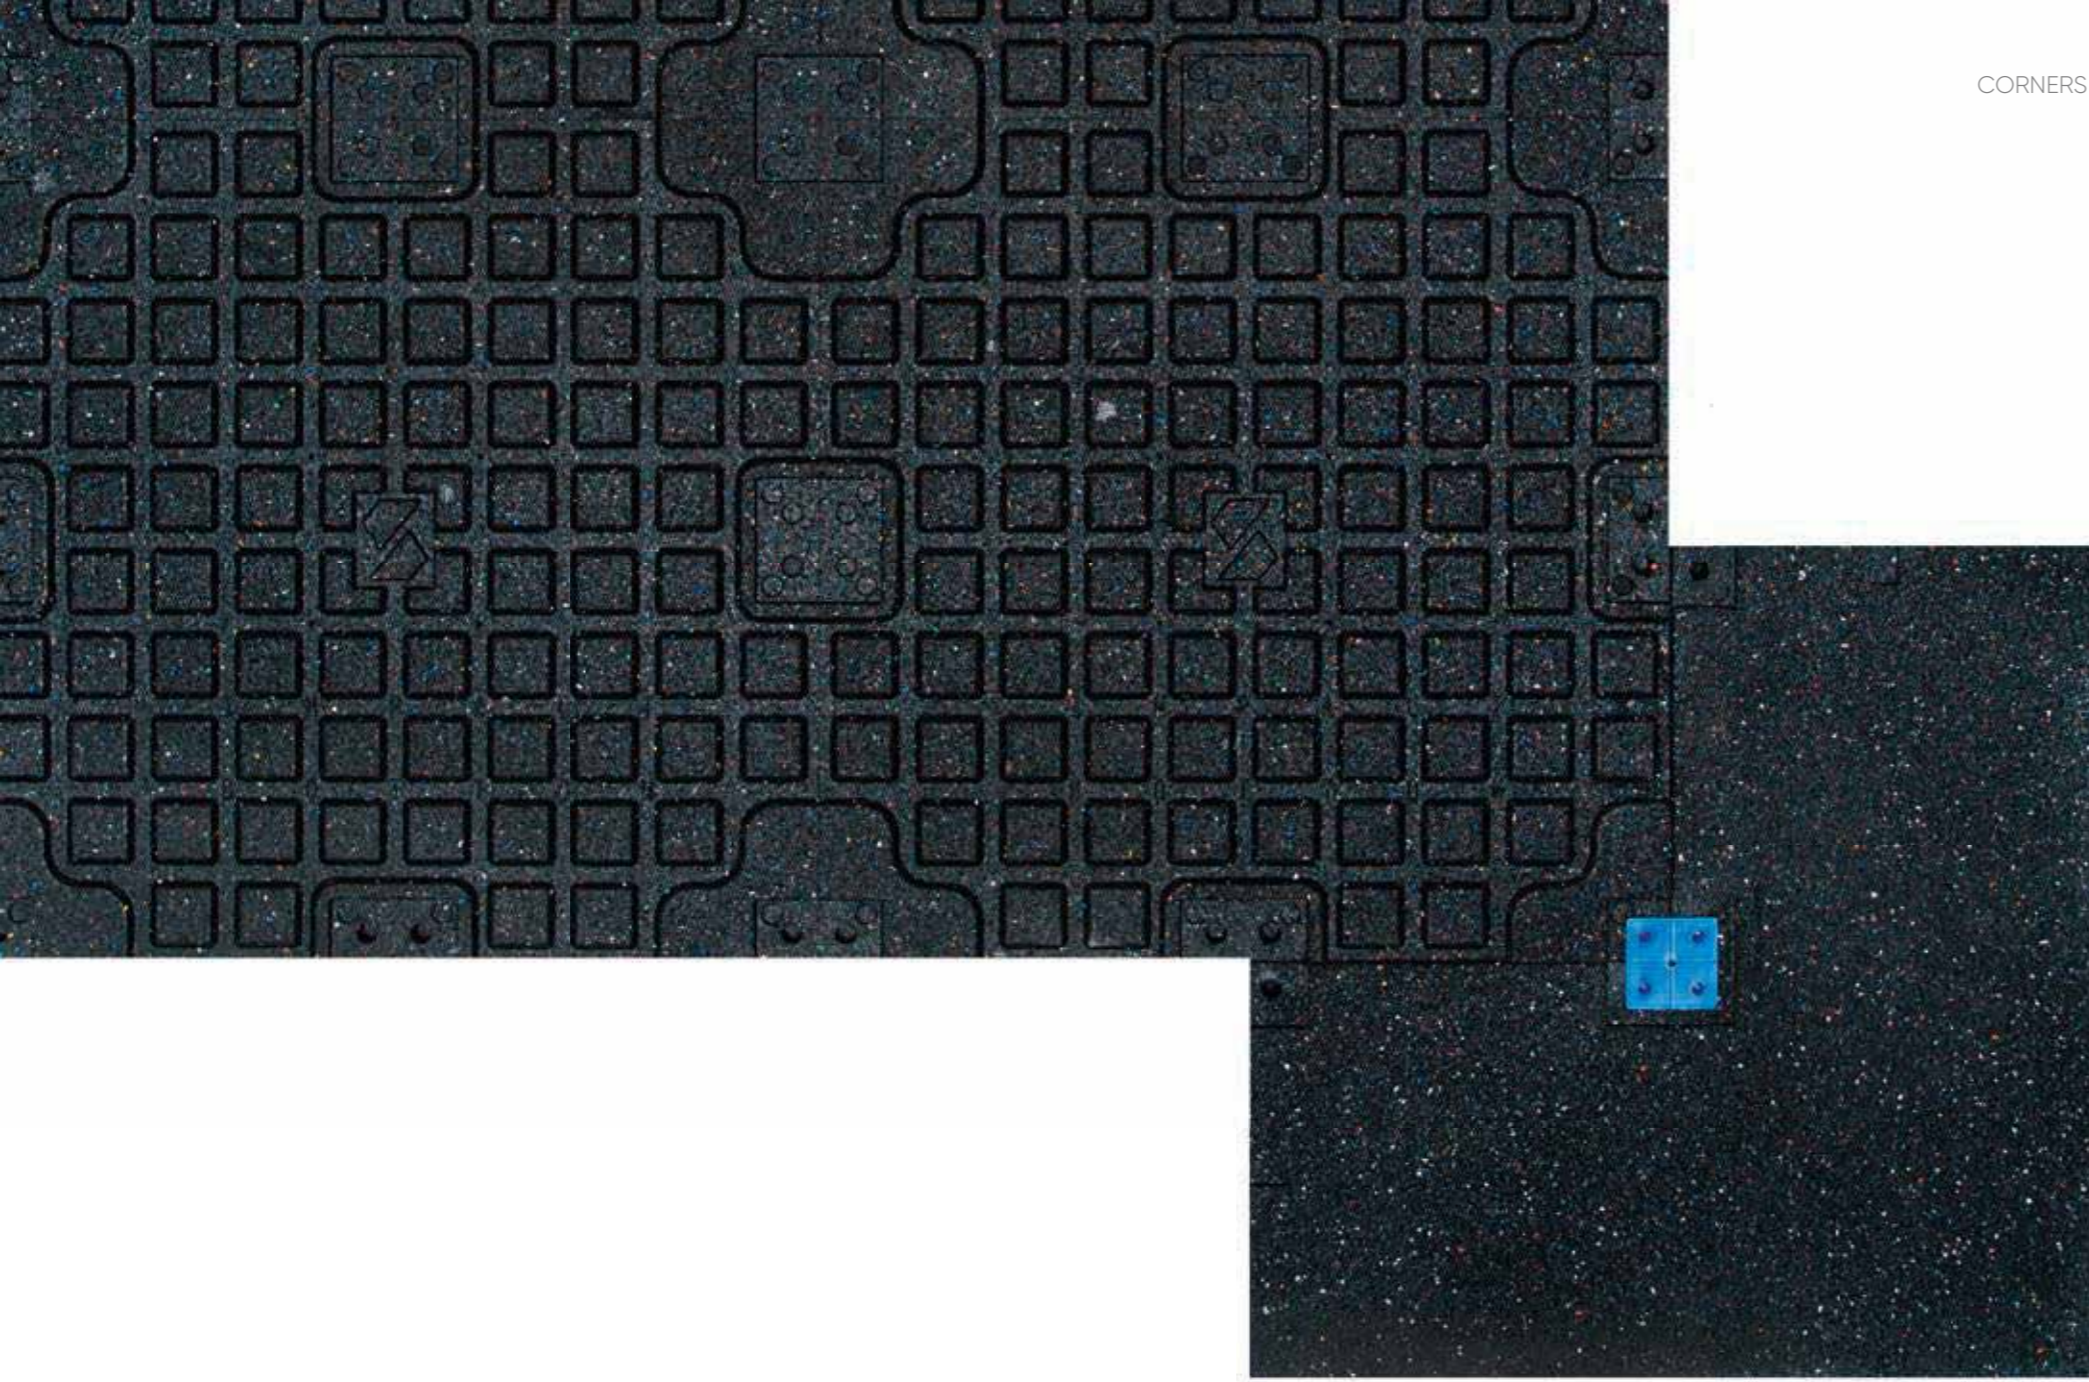

06. CORNERS

The Premium x-tile CORNERS are available in 100% pure black and with 15% coloured EPDM.


SPECIFICATIONS

Bulk density toplayer	From approx. 1.050 kg/řm ³ to 1.450 kg/řm ³	
Bulk density sublayer	Approx. 1.000 kg/řm ³	
Tolerances	+/- 1,5 %	
Sound insulation Certified Noise Reducing	20mm	21dB reduction
	30mm	24dB reduction
	40mm	not specified
Shock Absorption	EN 14808	61%
Vertical deformation	EN 14809	5 mm
Head injury criteria (HIC) test	EN 1177	1,5 m at 50 mm thickness
EU fire classification	EF1	
Dynamic coefficient of friction	Dry slip resistance	
Thermal resistance	0,16 m ² . K/W	
Additional	Compliance with content of pentachlorophenol Antistatic floor covering	

COLOURS


Dimensions & Thickness

Dimension	500 x 500 mm					
20 mm						
	pure black	15% light grey	15% dark grey	15% blue	15% green	15% red
30 mm						
	15% yellow	stone	granite	beach	desert	
40 mm						
	100% pure black	15% light grey	stone	15% dark grey		
40 mm						
	100% pure black	15% light grey	stone	15% orange		

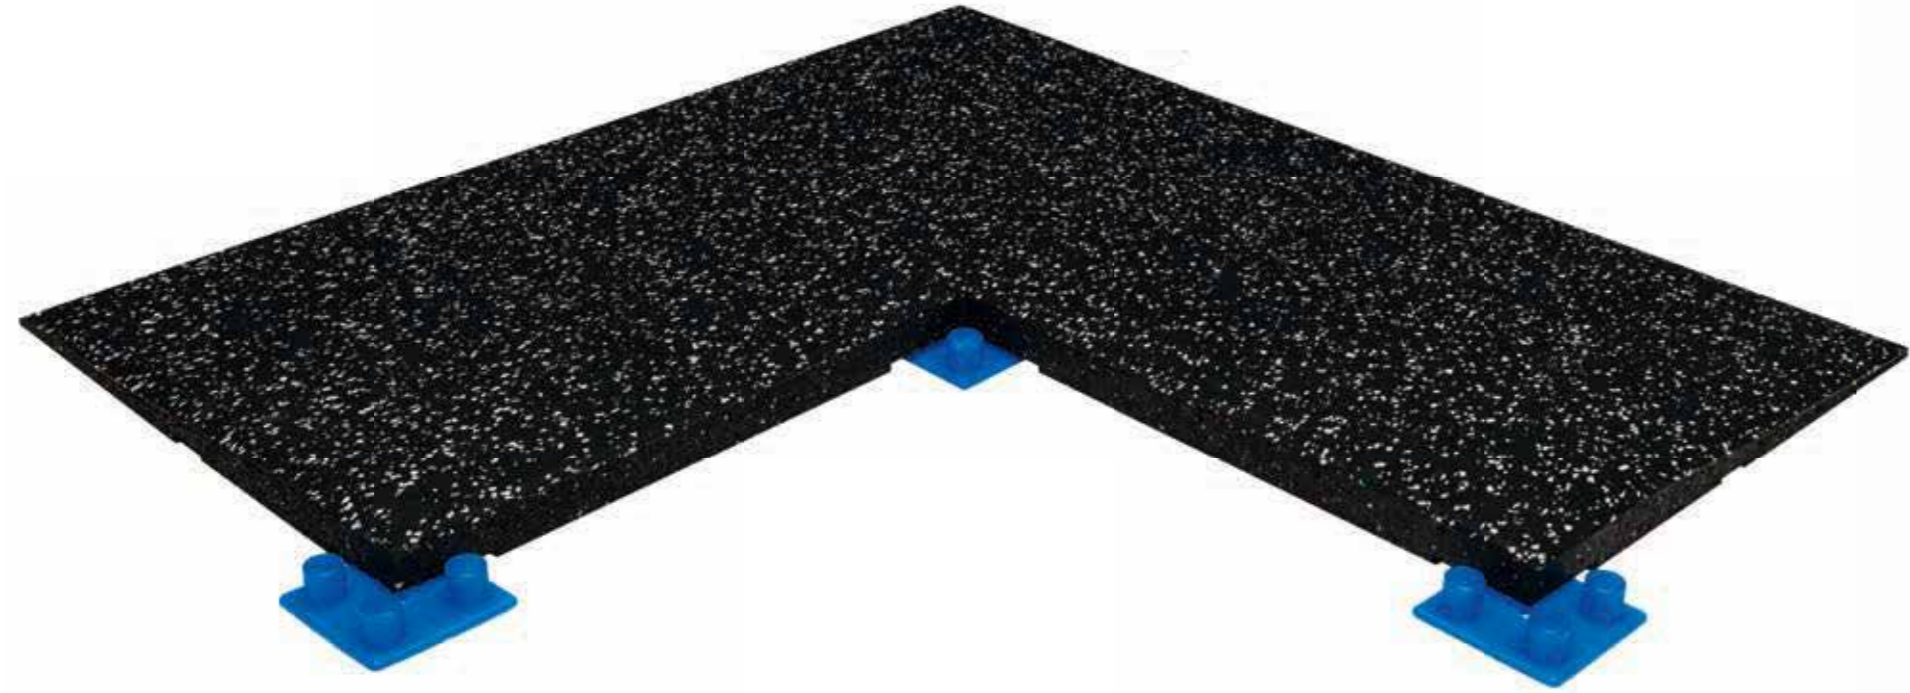



Evolve (Sweden)
100% pure black

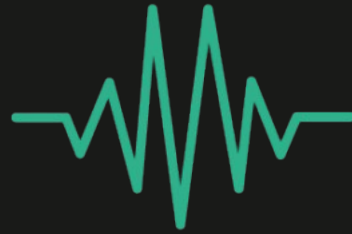

iBuildGreen
ECO SOLUTIONS

THANK YOU